

## AMED30-GY



DIN Rail



The AMED30-GY is a new step shape DIN rail AC-DC converter series featuring a cost effective, energy efficient solution. These lightweight AC-DC converters also have an extremely compact design and are ideal for applications such as industrial control equipment, building automation and numerous applications for harsh environments. Measuring 35.00 x 90.00 x 58.00mm, this series has ambient air-cooling vents both at the top and bottom of the converter to improve thermal performance. Thanks to its DIN rail nature, you can quickly swap the power supply for a higher power one if needed.

This new series offers great operating temperatures, from -20°C to 70°C and also features an isolation of 3000VAC for improved reliability and system safety. Furthermore, output short circuit protection (OSCP), overload protection (OLP), and an output overvoltage protection (OVP) come standard with the series.

## Features

- Universal Input: 90 - 264VAC/127 - 370VDC
- Operating Temp: -20 °C to +70 °C
- High isolation voltage: 3000VAC
- Low ripple & noise, 240mV(p-p), max.
- Short circuit protection, over-voltage protection, and overload protection.
- Overvoltage category III (OVC III)

## Summary

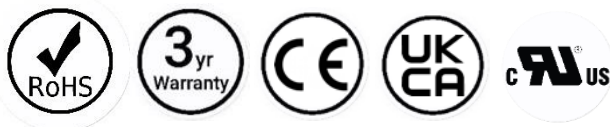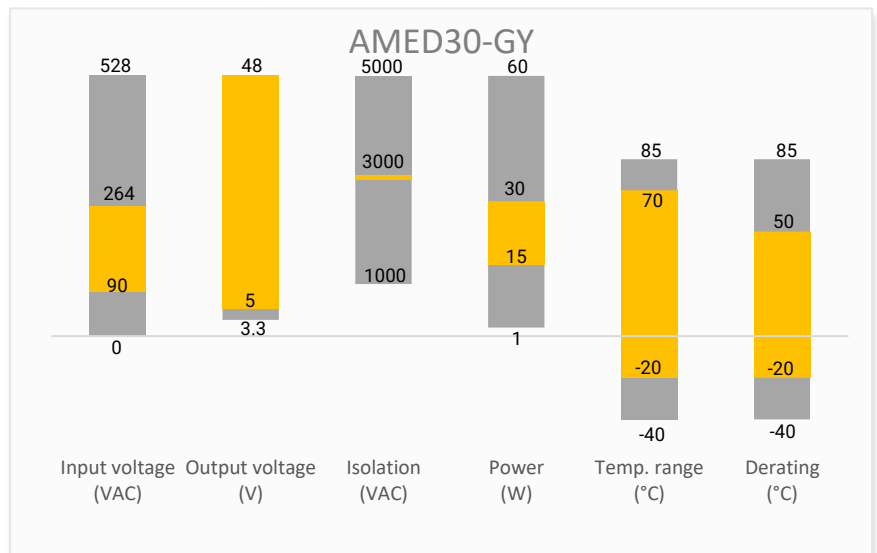

## Training



Product Training Video  
(click to open)



Press Release

Coming Soon!

Application Notes

## Applications



Power Grid



Industrial



Telecom

## Models & Specifications



| Model        | Input Voltage (VAC/Hz) | Input Voltage (VDC) | Max Output wattage (W) | Output Voltage (V) | Output Current max (mA) | Efficiency @ 230VAC Typ. (%) |
|--------------|------------------------|---------------------|------------------------|--------------------|-------------------------|------------------------------|
| AMED30-5SGY  | 90~264/47~63           | 127~370             | 15                     | 5                  | 3000                    | 82                           |
| AMED30-12SGY | 90~264/47~63           | 127~370             | 24                     | 12                 | 2000                    | 88                           |
| AMED30-15SGY | 90~264/47~63           | 127~370             | 30                     | 15                 | 2000                    | 89                           |
| AMED30-24SGY | 90~264/47~63           | 127~370             | 30                     | 24                 | 1250                    | 89                           |
| AMED30-48SGY | 90~264/47~63           | 127~370             | 30                     | 48                 | 630                     | 90                           |

### Input Specifications

| Parameters     | Conditions              | Typical | Maximum | Units |
|----------------|-------------------------|---------|---------|-------|
| Input Current  | 230VAC input, full load |         | 880     | mA    |
|                | 115VAC input, full load |         | 480     | mA    |
| Inrush Current | 230VAC input, full load | 25      |         | A     |
|                | 115VAC input, full load | 45      |         | A     |

### Output Specifications

| Parameters               | Conditions                     | Typical     | Maximum | Units  |
|--------------------------|--------------------------------|-------------|---------|--------|
| Voltage accuracy         | 0 - 100% load                  | ± 2         |         | %      |
| Line regulation          | Rated load                     | ± 1         |         | %      |
| Load regulation          | 230VAC                         | ± 1         |         | %      |
| Ripple & Noise           | 20MHz bandwidth, 5 VDC Output  |             | 80      | mV p-p |
|                          | 20MHz bandwidth, 12 VDC Output |             | 120     | mV p-p |
|                          | 20MHz bandwidth, 15 VDC Output |             | 120     | mV p-p |
|                          | 20MHz bandwidth, 24 VDC Output |             | 150     | mV p-p |
|                          | 20MHz bandwidth, 48 VDC Output |             | 240     | mV p-p |
| Hold up time             | 230VAC input, full load        | 30          |         | ms     |
|                          | 115VAC input, full load        | 12          |         | ms     |
| Start up time            | 230VAC input, full load        |             | 0.5     | S      |
|                          | 115VAC input, full load        |             | 0.5     | S      |
| Voltage adjustable range | 50% load, 5 VDC Output         | 4.5 - 5.5   |         | V      |
|                          | 50% load, 12 VDC Output        | 10.8 - 13.8 |         | V      |
|                          | 50% load, 15 VDC Output        | 13.5 - 18.0 |         | V      |
|                          | 50% load, 24 VDC Output        | 21.6 - 29.0 |         | V      |
|                          | 50% load, 48 VDC Output        | 43.2 - 55.2 |         | V      |



### Isolation Specifications

| Parameters            | Conditions                    | Typical | Maximum | Units  |
|-----------------------|-------------------------------|---------|---------|--------|
| Tested I/O voltage    | 60 sec, Leakage current < 5mA | 3000    |         | VAC    |
| Insulation Resistance | 500VDC, 25°C, 70%RH           | 100     |         | M Ohms |


| General Specifications  |  |            |         |         |
|---|--|------------|---------|---------|
| Parameters  | Conditions   | Typical    | Maximum | Units   |
| Overvoltage category  | OVC III; According to EN61558, EN50178, EN60664-1, EN62477-1   |            |         |         |
| Over voltage protection   | Voltage clamp or hiccup, 5 VDC Output  | ≤ 7.5      |         | VDC     |
|   | Voltage clamp or hiccup, 12 VDC Output   | ≤ 18       |         | VDC     |
|   | Voltage clamp or hiccup, 15 VDC Output   | ≤ 22.5     |         | VDC     |
|   | Voltage clamp or hiccup, 24 VDC Output   | ≤ 36       |         | VDC     |
|   | Voltage clamp or hiccup, 48 VDC Output   | ≤ 67.2     |         | VDC     |
| Overload protection   | 105~160% rated output power<br><50% rated output voltage, hiccup, auto-recovery<br>50%-100% rated output voltage, constant current limiting, auto-recovery |            |         |         |
| Short circuit protection  | Hiccup, auto-recovery  |            |         |         |
| Operating temperature   | 20~90% RH Non-Condensing   | -20 to +70 |         | °C      |
| Storage temperature   | 10~95% RH Non-Condensing   | -40 to +85 |         | °C      |
| Operating altitude  |  |            | 2000    | m       |
| Power derating  | 50 °C to 70 °C   | 2.5        |         | % / °C  |
|   | 90 to 100 VAC  | 2          |         | % / VAC |
| Temperature coefficient   | 0~50°C RH non-condensing   | ± 0.03     |         | % / °C  |
| Protection Class  | Class II   |            |         |         |
| Cooling   | Free air convection  |            |         |         |
| Storage Humidity  |  |            | 95      | % RH    |
| Case material   | Plastic  |            |         |         |
| Weight  |  | 120        |         | g       |
| Dimensions (L x W x H)  | 1.38 x 3.54 x 2.28 inches (35.00 x 90.00 x 58.00 mm)   |            |         |         |
| NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. |  |            |         |         |

| Safety Specifications |  |   |
|-----------------------|--|---|
| Parameters            |  |   |
| Agency approval       | UL 62368-1, BS EN/EN62368-1              |   |
| Standards             | EMC - Conducted and radiated emission    | CISPR32 / EN55032, Class B, BS EN/EN IEC61000-3-2,3 |
|                       | EMC - Conducted and radiated emission    | CISPR32 / EN55032, Class B                          |
|                       | Harmonic Current emission                | IEC/EN 61000-3-2, Class A                           |
|                       | Voltage Fluctuations & Flicker           | IEC/EN 61000-3-3                                    |
|                       | Electrostatic Discharge Immunity         | IEC/EN 61000-4-2 Contact ±4KV, Air ±8KV, Criteria B |
|                       | RF, Electromagnetic Field Immunity       | IEC/EN 61000-4-3 3V/m, Criteria A                   |
|                       | Electrical Fast Transient/Burst Immunity | IEC/EN 61000-4-4 ±1KV, Criteria B                   |
|                       | Surge Immunity                           | IEC/EN 61000-4-5 L-L ±1KV, L-G ±2KV, Criteria B     |
|                       | CS, Conducted Disturbance Immunity       | IEC/EN 61000-4-6 3V, 3V~1V, 1V r.m.s, Criteria A    |
|                       | Power Frequency Magnetic Field Immunity  | IEC/EN 61000-4-8 50, 60Hz, Criteria A               |




Derating

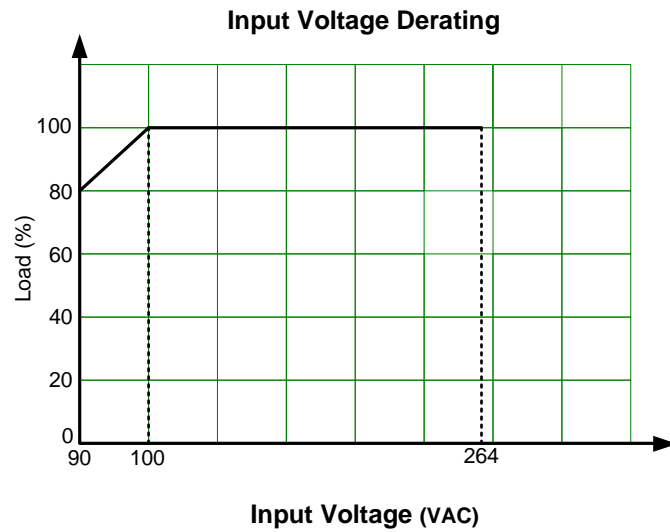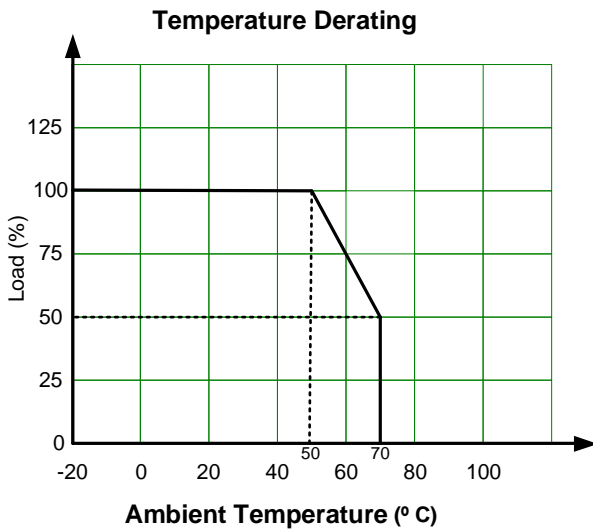

Functional Diagram

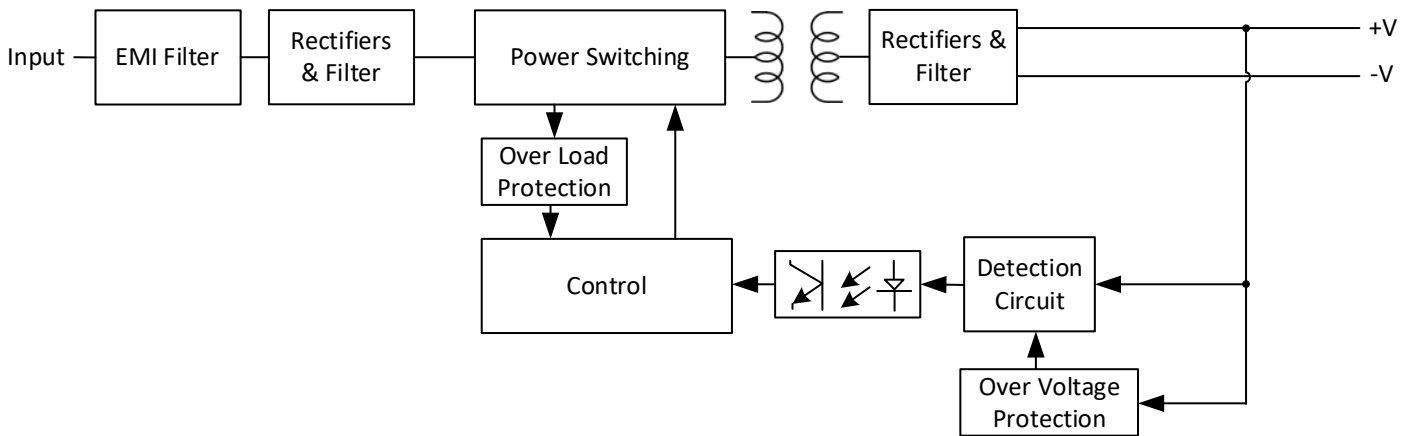

## Dimensions

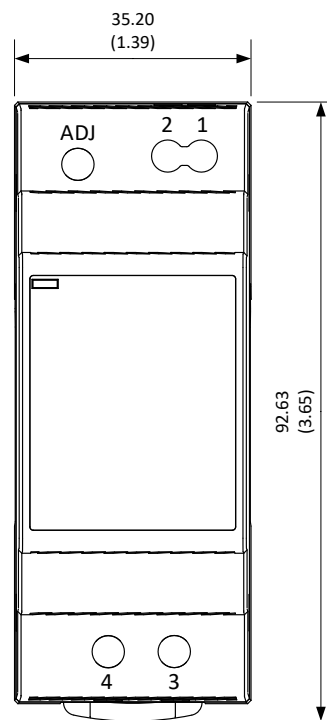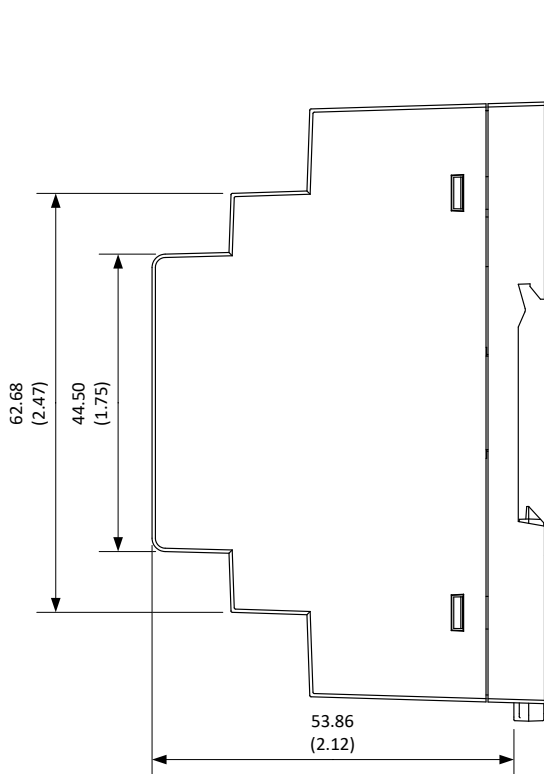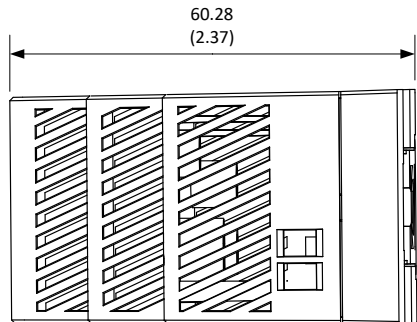

| Pin Output Specifications |                    |
|---------------------------|--------------------|
| Pin                       | Function           |
| 1                         | +V Output          |
| 2                         | -V Output          |
| 3                         | Input (L)          |
| 4                         | Input (N)          |
| ADJ                       | Voltage adjustment |

Unit: mm (inch)

General tolerance:  $\pm 1.0$  (0.04)

Wire gauge: 24 – 12AWG

Tightening torque: 0.4N·m Max.

Mounting rail: TS35,

Rail must be connected to safety ground.

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).