


Click to  
**ORDER**  
samples

**AMESP150-277NZ**

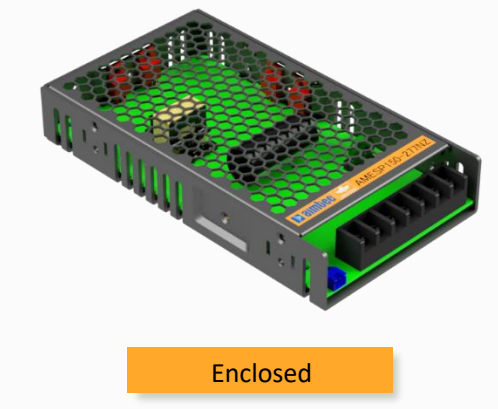

Enclosed

The AMESP150-277NZ is an AC/DC converter that offers much greater cost effectiveness due to material normalization and production automation also leading to improved reliability and performance. Offering a commercial input voltage range of 90-305VAC and an output voltage range from 5-48V, this series will offer many benefits to your new system design.

This new series offers great operating temperatures, from -30°C to 50°C with full power also features isolation of 4000VAC for improved reliability and system safety. Furthermore, a high MTBF of 280,000h, output short circuit protection (OSCP), output over-current protection (OCP), output over-voltage protection (OVP) and over-temperature protection (OTP) come standard with the series.


The AMESP150-277NZ is suitable for street lighting controls, grid power, instrumentation, industrial controls, communication, and civil applications.

**Features**



- Universal Input: 90 - 305VAC/127 - 430VDC
- Operating Temp: -30 °C to +70 °C
- PFC function
- High isolation voltage: Up to 4000VAC
- Low ripple & noise, 250mV(p-p).
- Output short circuit, over-current, over-voltage and over temperature protection
- Regulated Output
- Optional conformal coating


**Summary**

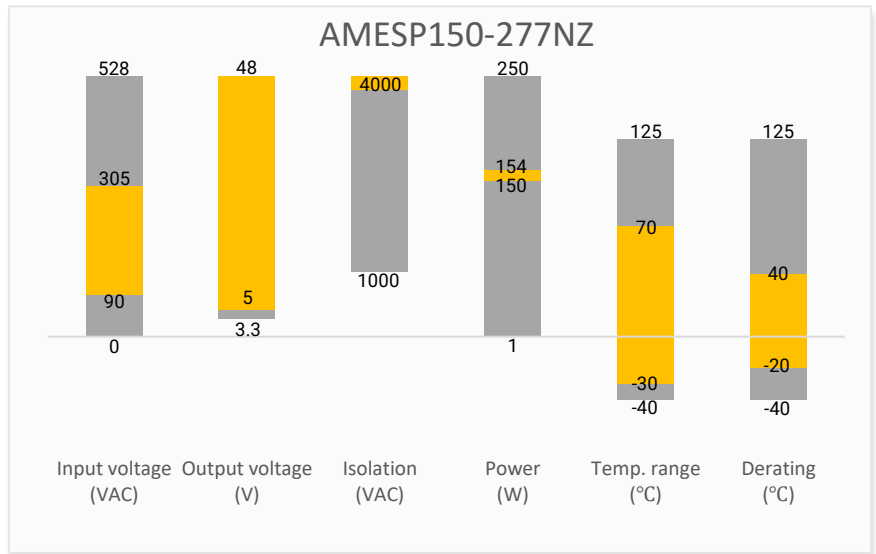

**Training**



Product Training Video  
(click to open)



Application Notes

**Applications**



Power Grid

Industrial

Telecom

Instrumentation

## Models & Specifications

Single Output							
Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output Wattage (W)	Output Voltage (V)	Output Voltage Adjustable Range (V)	Output Current max (A)	Average Efficiency (%)
AMESP150-5S277NZ-P	90-305/47-63	127-430	150	5	4.75-5.5	30	87
AMESP150-7S277NZ-P	90-305/47-63	127-430	150	7.5	6.75-8.25	20	88
AMESP150-12S277NZ-P	90-305/47-63	127-430	150	12	11.4-13.2	12.5	89
AMESP150-15S277NZ-P	90-305/47-63	127-430	150	15	14.3-16.5	10	88.5
AMESP150-24S277NZ-P	90-305/47-63	127-430	151.2	24	22.8-26.4	6.3	89
AMESP150-27S277NZ-P	90-305/47-63	127-430	151.2	27	25.7-29.7	5.6	89.5
AMESP150-48S277NZ-P	90-305/47-63	127-430	153.6	48	45.6-52.8	3.2	90

Note: The "-P" suffix indicates a terminal protective cover (ex. AMESP150-5S277NZ-P). For optional conformal coating, add "Q" after the "-P" (ex. AMESP150-5S277NZ-PQ is conformal coated version with terminal protective cover).

Input Specifications					
Parameters	Conditions	Typical	Maximum	Units	
Input current	115VAC		1.6	A	
	230VAC		0.8	A	
Inrush current	230VAC, cold start		45	A	
Power factor	115VAC, Full load	0.98			
	230VAC, Full load	0.93			
Leakage current	240VAC		2	mA	

Output Specifications					
Parameters	Conditions	Typical	Maximum	Units	
Voltage accuracy	Full load	±2		%	
Line regulation	Full load	±0.5		%	
Load regulation	0-100% load, 5V output	±1		%	
	0-100% load, other output	±0.5		%	
Ripple & Noise*	5V,7.5V,12V,15V output	100		mV p-p	
	24V,27V output	150		mV p-p	
	48V output	250		mV p-p	
Remote control	Power ON, 0-0.8VDC	≥ 0	0.8	VDC	
	Power OFF, 4-10VDC	≥ 4	10	VDC	
Hold up time	230VAC	≥ 16		ms	

\* Ripple and Noise are measured at 20MHz bandwidth with a 47µF electrolytic capacitor and a 0.1µF ceramic capacitor. Please refer to the application not for specific details.



Isolation Specifications					
Parameters	Conditions	Typical	Rated	Units	
Tested I/O voltage			4000	VAC	
Tested Input to GND voltage			2000	VAC	
Tested Output to GND voltage			500	VAC	
Resistance (I/O, I/O to GND)*	500VDC		100	MΩ	

\* Tested under 25±5°C ambient temperature with relative humidity <95% and no condensation.



General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Over voltage category	OVC III			
Over Current protection	Constant current limiting, Auto recovery	≥ 105	135	% of I <sub>out</sub>
Over voltage protection	Output voltage turn off, Manual recovery, 5V output	5.75	6.75	VDC
	Output voltage turn off, Manual recovery, 7.5V output	8.6	10.2	VDC
	Output voltage turn off, Manual recovery, 12V output	13.2	16.2	VDC
	Output voltage turn off, Manual recovery, 15V output	16.5	20.25	VDC
	Output voltage turn off, Manual recovery, 24V output	26.4	32.4	VDC
	Output voltage turn off, Manual recovery, 27V output	29.7	36.45	VDC
	Output voltage turn off, Manual recovery, 48V output	52.8	64.8	VDC
Over temperature protection	Shut-down, Auto recovery			
Short circuit protection	Hiccup, Continuous, Auto recovery			
Operating temperature	See derating graph	-30 to +70		°C
Storage temperature		-40 to +85		°C
Power derating	40 °C to 60 °C, 5V output	2		% / °C
	50 °C to 70 °C, others	2		% / °C
	90VAC ~ 100VAC	2		% / VAC
Temperature coefficient	0 ~ 50°C	±0.05		% / °C
Cooling	Free air convection			
Humidity	Non-condensing, Storage	≥ 10	95	% RH
Case material	Metal			
Weight		550		g
Dimensions (L x W x H)	7.05 x 3.90 x 1.18inch (179.0 x 99.0 x 30.0mm)			
MTBF	> 280 000 hrs MIL-HDBK-217F(25°C)			
NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.				

Safety Specifications		
Parameters		
Standards	Information technology Equipment	Design to meet BS EN/EN62368-1, BS EN/EN61558-1, BS EN/EN61558-2-16
	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B
	Harmonic current	IEC 61000-3-2
	Voltage flicker	IEC 61000-3-3
	Electrostatic Discharge Immunity	IEC 61000-4-2
	RF, Electromagnetic Field Immunity	IEC 61000-4-3
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4
	Surge Immunity	IEC 61000-4-5
	RF, Conducted Disturbance Immunity	IEC 61000-4-6
	Power-frequency Magnetic Field	IEC 61000-4-8
Voltage dips, Short Interruptions Immunity	IEC 61000-4-11	


Derating

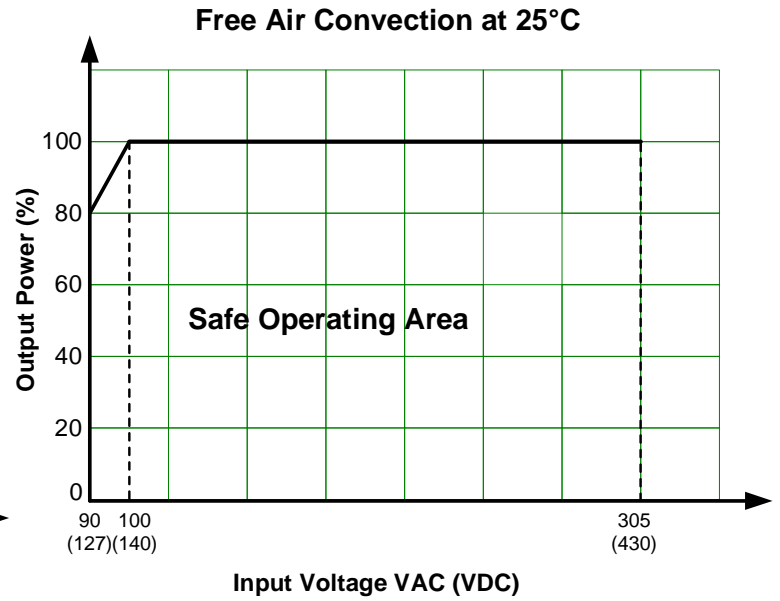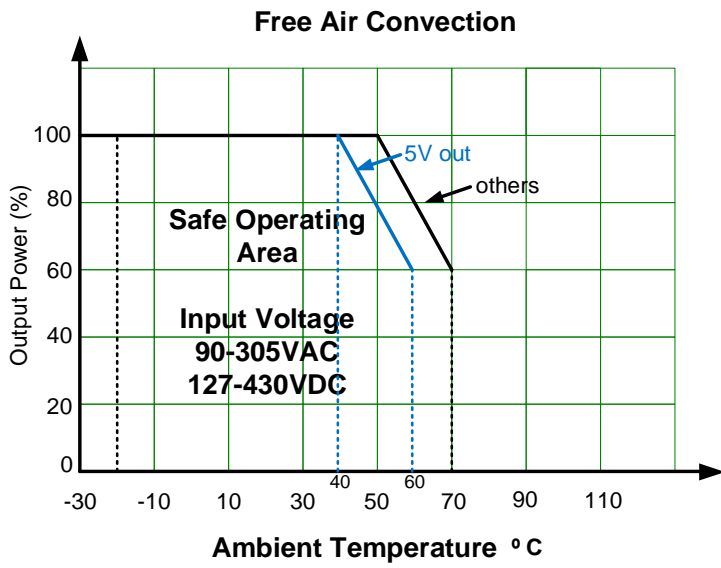

## Dimensions

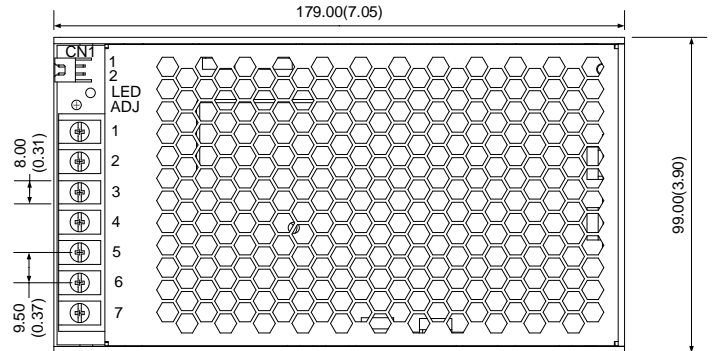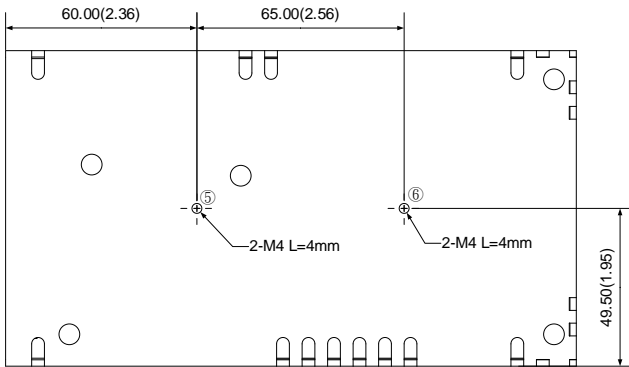

Note:  
Unit: mm(inch)  
Wire gauge: 22-12AWG  
Connector tightening torque: M3.5, 0.8N-m  
General tolerance:  $\pm 1.0(0.04)$   
At least one of the ① - ⑥ location must be connected to PE

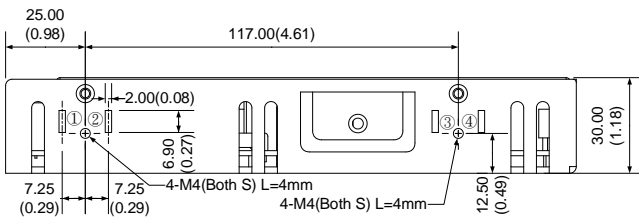

CN1 (JST S2B-XH or equivalent)		
Pin	Function	Connector
1	RC+	XH2.54
2	RC-	

Pin Output Specifications	
Pin	Single
1	+V Output
2	+V Output
3	-V Output
4	-V Output
5	GND
6	AC Input (N)
7	AC Input (L)

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).