

Click to
ORDER
samples

AMESP200U-NZ



Enclosed

The AMESP200U-NZ series is an efficient, enclosed, fan less, ultra-narrow, and semi-potted 200W AC/DC power supply module. It offers a wide commercial input voltage range of 90-264VAC, output voltage ranges from 5-48V, low power consumption, high efficiency, high reliability, and safer isolation.

This new series offers great operating temperatures, from -30°C to +70°C with full power up to 50°C and features an isolation of 3750VAC with improved reliability and system safety. Furthermore, a high MTBF of 250,000h, output short circuit protection (OSCP), output over-current protection (OCP), output over-voltage protection (OVP), and over temperature protection (OTP) come standard with the series.



The AMESP200U-NZ is suitable for street lighting controls, grid power, instrumentation, industrial controls, communication, and civil applications.

Features



- Universal Input: 90 - 264VAC/127 - 370VDC
- Operating Temp: -30 °C to +70 °C
- PFC>0.94
- High isolation voltage: Up to 3750VAC
- Low ripple & noise, 300mV(p-p) typ.
- Output short circuit, over-current, over-voltage and over temperature protection
- Regulated Output
- Optional conformal coating
- Active power factor correction

Summary

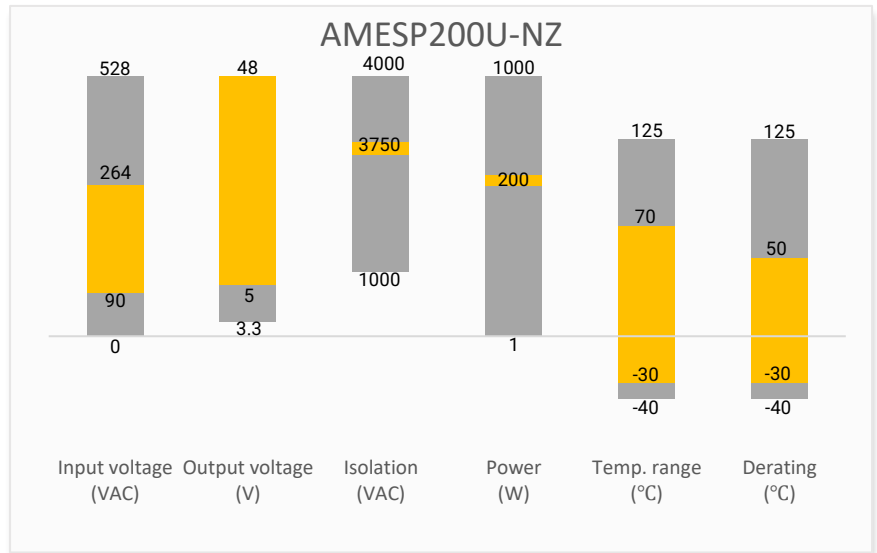

Training



Product Training Video
(click to open)



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom



Instrumentation

Models & Specifications

Single Output

Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output Wattage (W)	Output Voltage (V)	Output Voltage Adjustable Range (V)	Output Current max (A)	Maximum capacitive load (μ F)	Average Efficiency (%)
AMESP200U-5SNZ-P	90-264/47-63	127-370	200	5	4.5-5.5	40	10000	91
AMESP200U-12SNZ-P	90-264/47-63	127-370	200.4	12	11.4-12.6	16.7	8000	93
AMESP200U-15SNZ-P	90-264/47-63	127-370	201	15	14.3-15.8	13.4	7000	94
AMESP200U-24SNZ-P	90-264/47-63	127-370	201.6	24	22.8-25.2	8.4	5000	94
AMESP200U-36SNZ-P	90-264/47-63	127-370	201.6	36	34.2-37.8	5.6	3000	94
AMESP200U-48SNZ-P	90-264/47-63	127-370	201.6	48	45.6-50.4	4.2	2000	94

Note: The “-P” suffix indicates a terminal protective cover (ex. AMESP200U-12SNZ-P). For optional conformal coating, add “Q” after the “-P” (ex. AMESP200U-12SNZ-PQ is conformal coated version with terminal protective cover).

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Input current	115VAC	2.2		A
	230VAC	1.1		A
Inrush current	115VAC, cold start	40		A
	230VAC, cold start	80		A
Power factor	115VAC, Full load	0.98		
	230VAC, Full load	0.94		
Leakage current	240VAC		0.75	mA

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy	Full load, 5V output	± 2		%
	Full load, others output	± 1		%
Line regulation	Full load	± 0.5		%
Load regulation	0-100% load, 5V output	± 1		%
	0-100% load, others output	± 0.5		%
Ripple & Noise*	5V output		200	mV p-p
	12V, 15V, 24V, 36V output		240	mV p-p
	48V output		300	mV p-p
Hold up time	115VAC	10		ms
	230VAC	10		ms

* Ripple and Noise are measured at 20MHz bandwidth with a 47 μ F electrolytic capacitor and a 0.1 μ F ceramic capacitor. Please refer to the application note for specific details.

Isolation Specifications				
Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		3750	VAC
Tested Input to GND voltage	60 sec		2000	VAC
Tested Output to GND voltage	60 sec		1250	VAC
Resistance (I/O, I/O to GND) *	500VDC		100	MΩ

* Tested under 25±5°C ambient temperature with relative humidity <95% and no condensation.

General Specifications				
Parameters	Conditions	Typical	Maximum	Units
Safety class	Class I			
Over voltage category	OVC III, According to EN62368-1			
Over Current protection	Hiccup, Auto recovery	≥ 110	140	% of Iout
Over voltage protection	Shut-down, Manual recovery, 5V output		6.75	VDC
	Shut-down, Manual recovery, 12V output		15.6	VDC
	Shut-down, Manual recovery, 15V output		19.5	VDC
	Shut-down, Manual recovery, 24V output		31.2	VDC
	Shut-down, Manual recovery, 36V output		46.8	VDC
	Shut-down, Manual recovery, 48V output		62.4	VDC
Over temperature protection	Shut-down, Auto recovery			
Short circuit protection	Hiccup, Auto recovery			
Operating temperature	See derating graph	-30 to +70		°C
Storage temperature		-40 to +85		°C
Power derating	50 °C to 70 °C	2		% / °C
	90VAC ~ 110VAC@60Hz	1		% / VAC
Temperature coefficient	0 ~ 50 °C	±0.03		% / °C
Cooling	Free air convection			
Humidity	Non-condensing, Storage	≥ 10	95	% RH
	Non-condensing, Operating	≥ 20	90	% RH
Case material	Metal			
Weight		500		g
Dimensions (L x W x H)	7.68 x 2.16 x 1.02inch (195.0 x 54.8 x 26.0mm)			
Vibration	10 ~ 500Hz, 5G 10min / 1cycle, 60min. Each along X, Y, Z axes			
MTBF	> 250 000 hrs MIL-HDBK-217(25°C)			

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications


Parameters

Standards	Over voltage category	Design to meet III; According to EN62368-1
	Information technology Equipment	Design to meet BS EN/EN62368-1, EN/EN61558-1, BS EN/EN61558-2-16, BS/EN60335-1
	EMC - Conducted and radiated emission	CISPR32 / EN55032, class B
	Harmonic current	IEC 61000-3-2
	Voltage flicker	IEC 61000-3-3
	Electrostatic Discharge Immunity	IEC 61000-4-2
	RF, Electromagnetic Field Immunity	IEC 61000-4-3
	Electrical Fast Transient/Burst Immunity	IEC 61000-4-4
	Surge Immunity	IEC 61000-4-5
	RF, Conducted Disturbance Immunity	IEC 61000-4-6
	Power-frequency Magnetic Field	IEC 61000-4-8
	Voltage dips, Short Interruptions Immunity	IEC 61000-4-11


Derating





Conduction Cooling

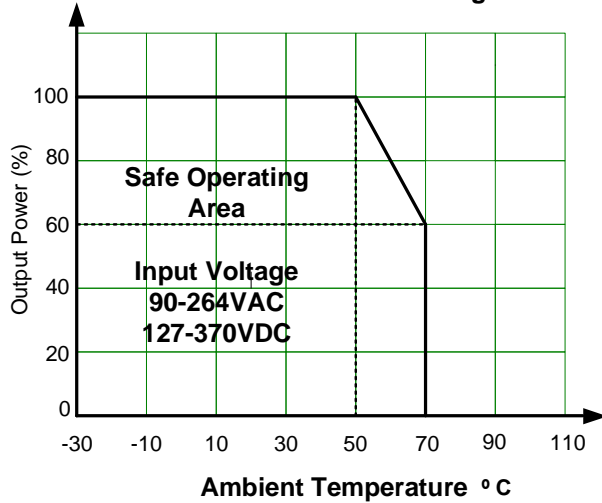


Convection Cooling

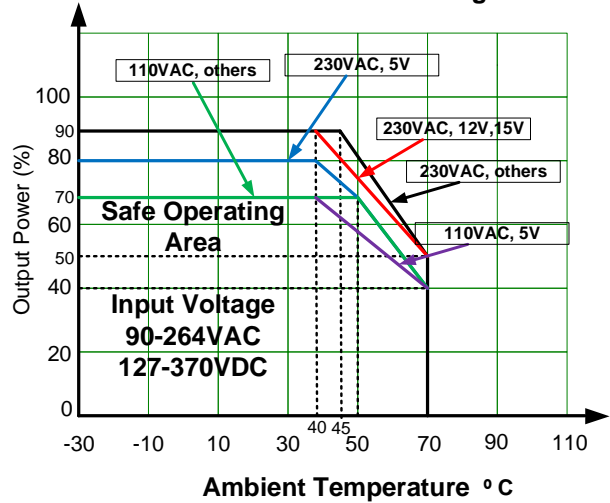

Free Air Convection

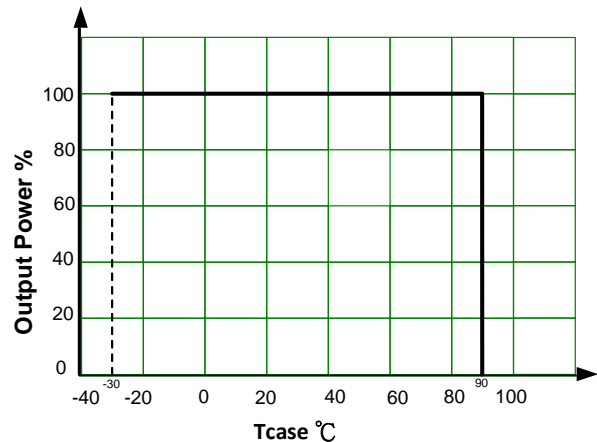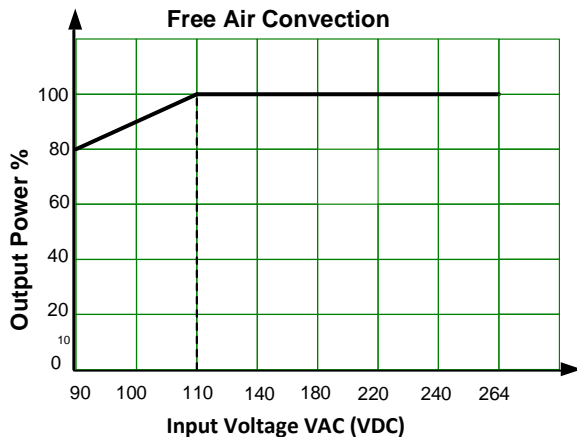

Dimensions

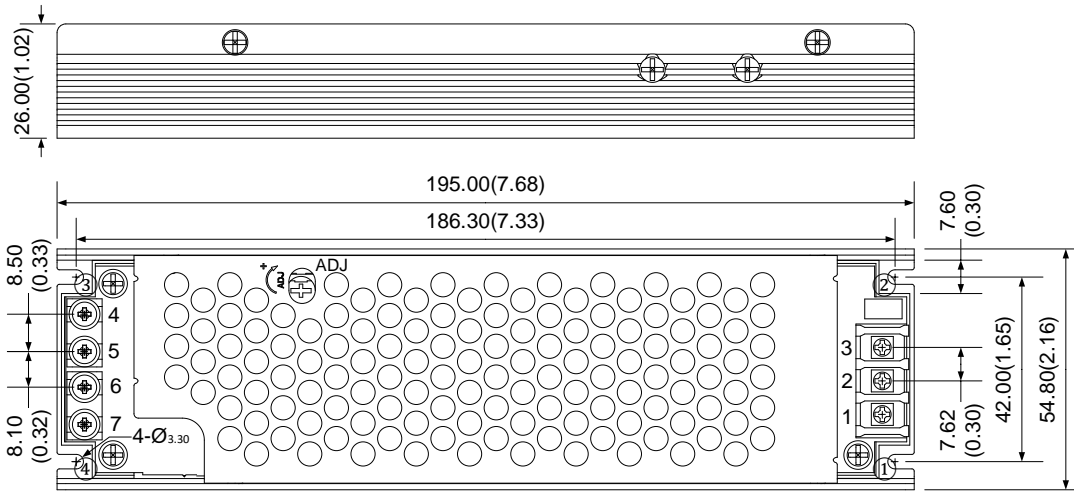

Pin Output Specifications	
Pin	Single
1	PE GND
2	AC Input (N)
3	AC Input (L)
4	+V Output
5	+V Output
6	-V Output
7	-V Output

Note:

Unit: mm(inch)



General tolerance: $\pm 1.0(0.04)$

Note:

1. Operate with additional aluminum plate

In order to meet the "Derating Curve" and the "Static Characteristics", the series model must be installed onto an aluminum plate (or the cabinet of the same size) on the bottom. The size of the suggested aluminum plate is 450mm x 450mm. And for optimizing thermal performance, the aluminum plate must have an even and smooth surface (or coated with thermal grease), and the series model must be firmly mounted at the center of the aluminum plate.

2. It is suggested to install the product with M3 combination screws, and the product must be firmly installed at the center of the aluminum plate.

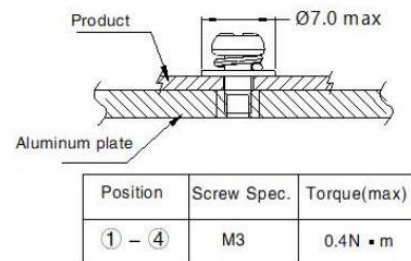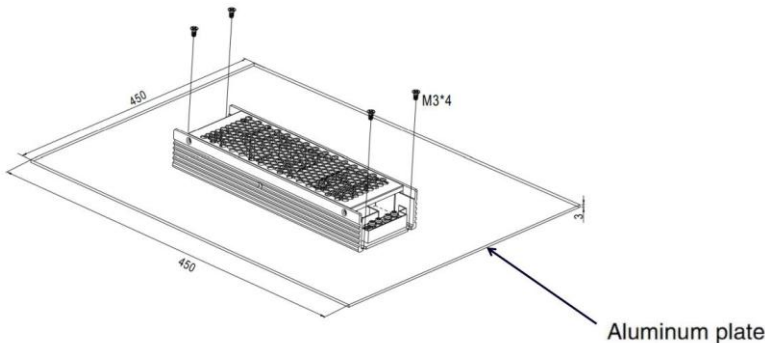

Position	Screw Spec.	Torque(max)
① - ④	M3	0.4N • m

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.