

Click to
ORDER
samples

AMESP350U-277JZ



Enclosed

The AMESP350U-277JZ series is an efficient, enclosed, fan less, and semi-potted 350W AC-DC power supply module. Offering a wide commercial input voltage range of 85-305VAC, output voltage ranges from 5-48V, low power consumption, high efficiency, high reliability, and safer isolation.

This new series offers great operating temperatures, from -40°C to +85°C with full power up to 50°C and features an isolation of 4000VAC with improved reliability and system safety. Additionally, it has operating altitude of 5000m. Furthermore, a high MTBF of 300,000h, output short circuit protection (OSCP), output over-current protection (OCP), output over-voltage protection (OVP) and an over-temperature protection (OTP) come standard with the series.

The AMESP350U-277JZ is suitable for street lighting controls, grid power, instrumentation, industrial controls, communication, and civil applications.


Features

- Universal Input: 85 - 305VAC/120 - 430VDC
- Operating Temp: -40°C to +85°C
- High isolation voltage: 4000VAC
- Active PFC > 0.95
- Output short circuit, over-current, over-voltage, over temperature protection
- Efficiency up to 94%
- 150% peak load output for 1 second
- Operating altitude up to 5000m
- Certified : EN/BS EN 62368-1
- Designed to meet: UL 62368-1, EN 60335-1, EN 61558-1, GB4943.1 standards



Summary

AMESP350U-277JZ

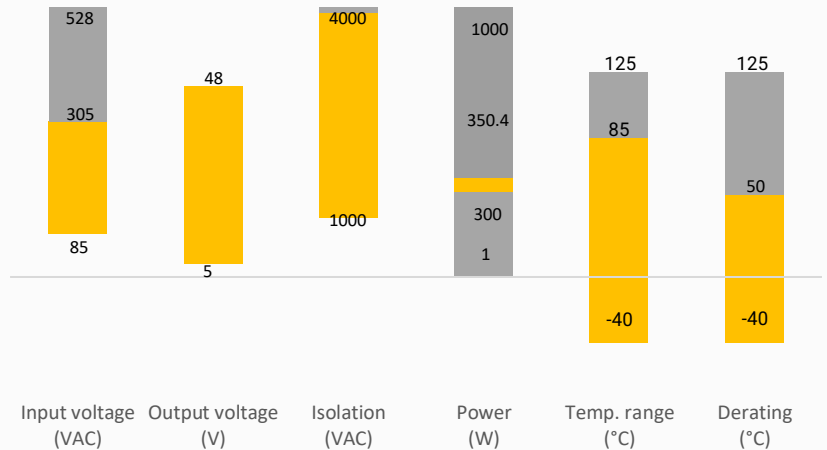

Training



Product Training Video



Press Release

Coming Soon!

Application Notes

Applications



Power Grid



Industrial



Telecom

Models & Specifications

Single Output

| Model | Input Voltage (VAC) | Input Voltage (VDC) | Max Output wattage (W) | Nominal Output Voltage/Current (Vo/Io) | Output Voltage Adjustable Range(V) | Max Capacitive Load at Room temp(μF) | Max Capacitive Load at Low temp(μF) | Efficiency @ 230VAC Typ. (%) |
|--------------------|---------------------|---------------------|------------------------|--|------------------------------------|--------------------------------------|-------------------------------------|------------------------------|
| AMESP350U-5S277JZ | 85-305 | 120-430 | 300 | 5/60 | 4.5-5.5 | 12000 | 6000 | 90 |
| AMESP350U-12S277JZ | 85-305 | 120-430 | 350.4 | 12/29.2 | 11.4-12.6 | 10000 | 4000 | 92 |
| AMESP350U-24S277JZ | 85-305 | 120-430 | 350.4 | 24/14.6 | 22.8-25.2 | 8000 | 3000 | 94 |
| AMESP350U-36S277JZ | 85-305 | 120-430 | 351 | 36/9.75 | 34.2-37.8 | 6000 | 2000 | 94 |
| AMESP350U-48S277JZ | 85-305 | 120-430 | 350.4 | 48/7.32 | 45.6-50.4 | 4000 | 1000 | 94 |

Input Specifications

| Parameters | Conditions | Typical | Minimum | Maximum | Units |
|---------------------|--------------------|---------|---------|---------|--------|
| Input current | 115VAC | | | 4 | A |
| | 230VAC | | | 2 | A |
| Inrush current | Cold Start, 115VAC | 16.7 | | | A |
| | Cold Start, 230VAC | 42.3 | | | A |
| Leakage | 240VAC, 50Hz | | | 0.5 | mA RMS |
| Input Frequency | | | 47 | 63 | Hz |
| Power Factor | Full Load, 115VAC | 0.98 | | | |
| | Full Load, 230VAC | 0.98 | | | |
| Input Voltage Range | AC Input | | 85 | 305 | VAC |
| | DC Input | | 120 | 430 | VDC |
| Hot Plug | Unavailable | | | | |

Output Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|------------------|---|---------|---------|--------|
| Voltage accuracy | Full Load, 5V | ±2 | | % |
| | Full Load, 12V/24V/36V/48V | ±1 | | % |
| Line regulation | Rated Load, 5V | ±0.5 | | % |
| | Rated Load, 12V/24V/36V/48V | ±0.3 | | % |
| Load Regulation | 0%-100% load, 5V | ±1 | | % |
| | 0%-100% load, 12V/24V/36V/48V | ±0.5 | | % |
| Ripple & Noise* | 20MHz bandwidth (peak to peak value), 5V/12V | | 200 | mV p-p |
| | 20MHz bandwidth (peak to peak value), 24V/36V/48V | | 240 | mV p-p |
| Hold up time | 115VAC | 12 | | ms |
| | 230VAC | 12 | | ms |

Note: *The "Tip and barrel method" is used for ripple and noise test, output parallel 47μF electrolytic capacitor and 0.1μF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

| Isolation Specification | | | | |
|---------------------------|----------------------------|---------|---------|------------|
| Parameters | Conditions | Minimum | Maximum | Units |
| Tested Input-GND | 60 sec, leakage \leq 5mA | 2000 | | VAC |
| Tested I/O voltage | | 4000 | | VAC |
| Tested Output-GND voltage | | 1500 | | VAC |
| Resistance | 500VDC | 50 | | M Ω |

| General Specifications | | | | | |
|--|---|------------|---------|---------|-----------------|
| Parameters | Conditions | Typical | Minimum | Maximum | Units |
| Safety class | Class I | | | | |
| Over current protection | 230VAC, rated load at room/high temperature, 110%-200%Io, delay protection, delay time 1s, self-recovery after the abnormality is removed | | | | |
| | 230VAC, rated load at low temperature, \geq 110%Io, delay protection, delay time 1s, self-recovery after the abnormality is removed | | | | |
| Over voltage protection | 5Vout, hiccup, self-recovery | | | 6.5 | VDC |
| | 12Vout, hiccup, self-recovery | | | 15.6 | VDC |
| | 24Vout, hiccup, self-recovery | | | 31.2 | VDC |
| | 36Vout, hiccup, self-recovery | | | 46.8 | VDC |
| | 48Vout, hiccup, self-recovery | | | 62.4 | VDC |
| Over temperature protection | Output voltage turn off, self-recovery after the temperature drops | | | | |
| Short circuit protection | 5V, Hiccup mode, constant current (200%Io-300%Io) works 200ms, turn off 10s, continuous, self-recovery Recovery time <10s after the short circuit disappear. | | | | |
| | 12V/24V/36V/48V, Hiccup mode, constant current (200%Io-300%Io) works 1s, turn off 10s, continuous, self-recovery Recovery time <10s after the short circuit disappear. | | | | |
| Operating temperature | See derating graph | -40 to +85 | | | $^{\circ}$ C |
| Storage temperature | | -40 to +85 | | | $^{\circ}$ C |
| Power Derating | 55 $^{\circ}$ C to 85 $^{\circ}$ C, with aluminum plate | | 2.33 | | %/ $^{\circ}$ C |
| | 55 $^{\circ}$ C to 70 $^{\circ}$ C, 230VAC, 5V output without aluminum plate | | 2 | | %/ $^{\circ}$ C |
| | 70 $^{\circ}$ C to 85 $^{\circ}$ C, 230VAC, 5V output without aluminum plate | | 1.33 | | %/ $^{\circ}$ C |
| | 55 $^{\circ}$ C to 70 $^{\circ}$ C, 230VAC, 12V/24V/36V/48V output without aluminum plate | | 3.33 | | %/ $^{\circ}$ C |
| | 70 $^{\circ}$ C to 85 $^{\circ}$ C, 230VAC, 12V/24V/36V/48V output without aluminum plate | | 1.33 | | %/ $^{\circ}$ C |
| | 55 $^{\circ}$ C to 85 $^{\circ}$ C, 110VAC, without aluminum plate | | 1.33 | | %/ $^{\circ}$ C |
| | 80VAC ~ 100VAC input voltage | | 2 | | %/VAC |
| Cooling | Free air convection | | | | |
| Humidity | Non-condensing | | 10 | 95 | % RH |
| Case material | Metal (AL6063, SGCC) | | | | |
| Weight | | 680 | | | g |
| Dimensions (L x W x H) | 8.66 x 2.44 x 1.22 inches (220.00 x 62.00 x 31.00 mm) | | | | |
| MTBF | > 300,000 hrs (MIL-HDBK - 217F, t=+25 $^{\circ}$ C) | | | | |
| NOTE: All specifications in this datasheet are measured at an ambient temperature of 25 $^{\circ}$ C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. | | | | | |

Safety Specifications

Parameters


| | | |
|--|--|--|
| Agency approvals | EN/BS EN62368-1 | |
| Standards | Information technology Equipment | Designed to meet UL62368-1, EN60335-1, EN61558-1, GB4943.1 |
| | EMC - Conducted and radiated emission | CISPR32 / EN55032, class B |
| | Harmonic Current | IEC/EN61000-3-2 CLASS A |
| | Voltage flicker | IEC/EN6100-3-3 |
| | Electrostatic Discharge Immunity | IEC/EN 61000-4-2 Contact ± 6 KV, Air ± 8 KV, Criteria A |
| | RF, Electromagnetic Field Immunity | IEC/EN 61000-4-3 10V/m, Criteria A |
| | Electrical Fast Transient/Burst Immunity | IEC/EN 61000-4-4 ± 2 KV, Criteria A with the recommended EMC circuit |
| | Surge Immunity | IEC/EN 61000-4-5 L-L ± 2 KV, L-GND ± 4 KV, Criteria A |
| | RF, Conducted Disturbance Immunity | IEC/EN 61000-4-6 10Vr.m.s, Criteria A |
| Voltage dips, Short Interruptions Immunity | IEC/EN 61000-4-11 0%, 70%, Criteria B | |

Derating




With Aluminum Plate

Free Air Convection

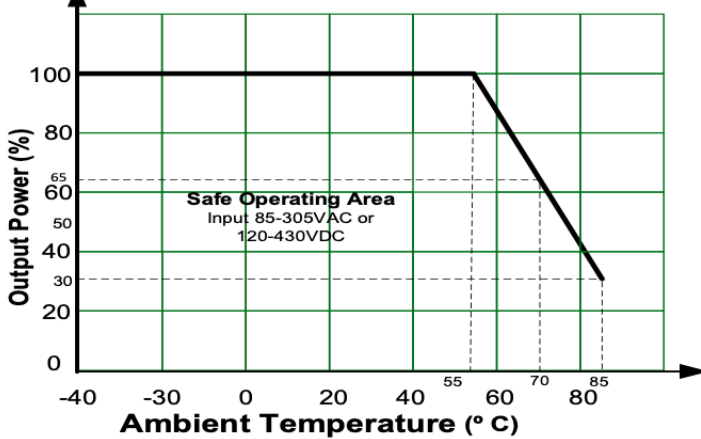


Without Aluminum Plate



Free Air Convection

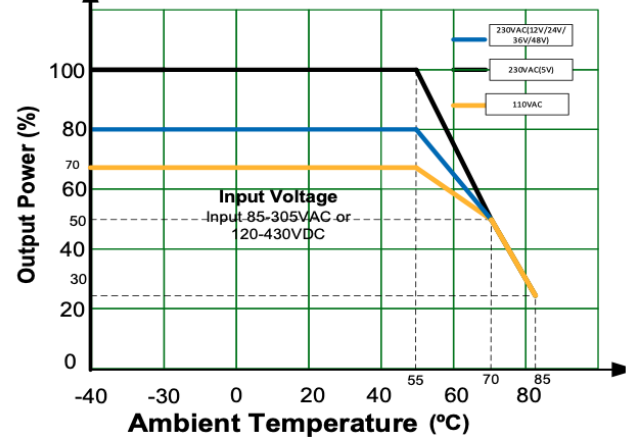


Input Voltage Derating Curve

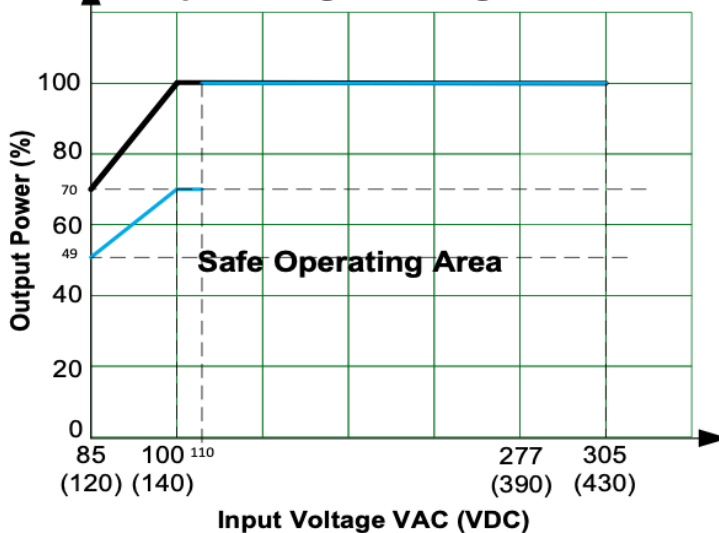

Efficiency vs input voltage

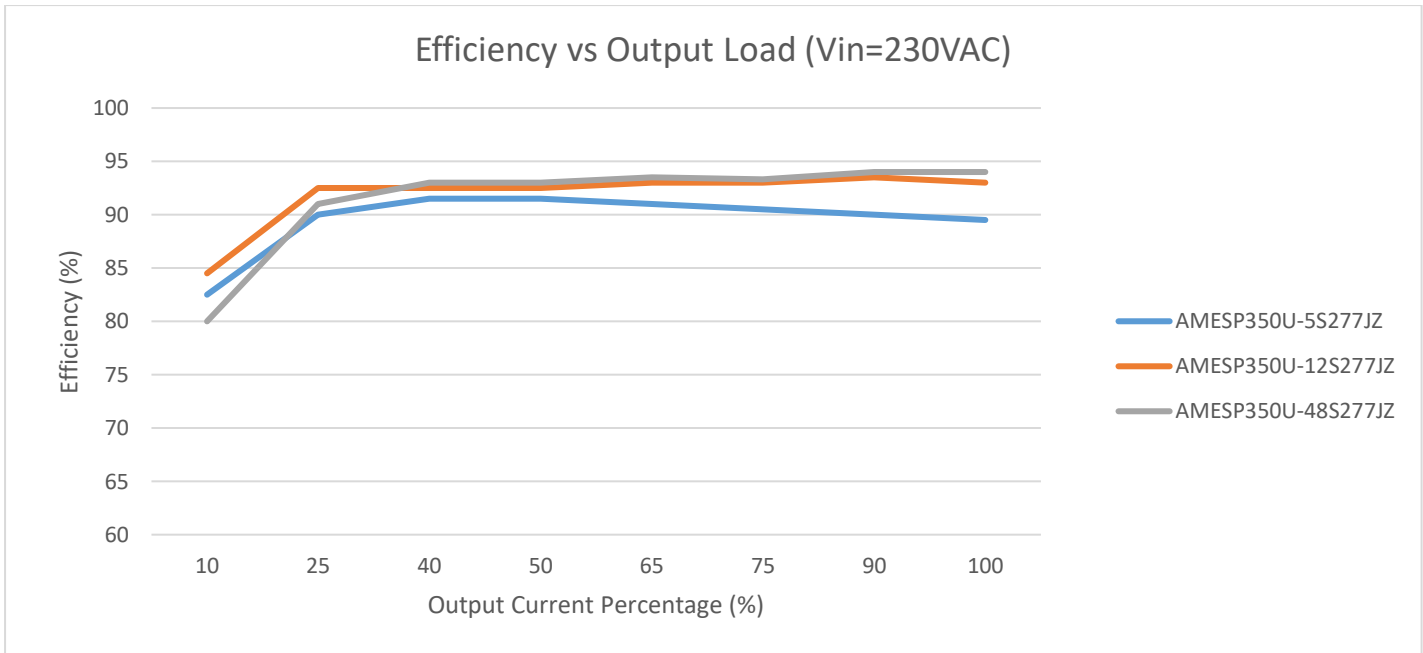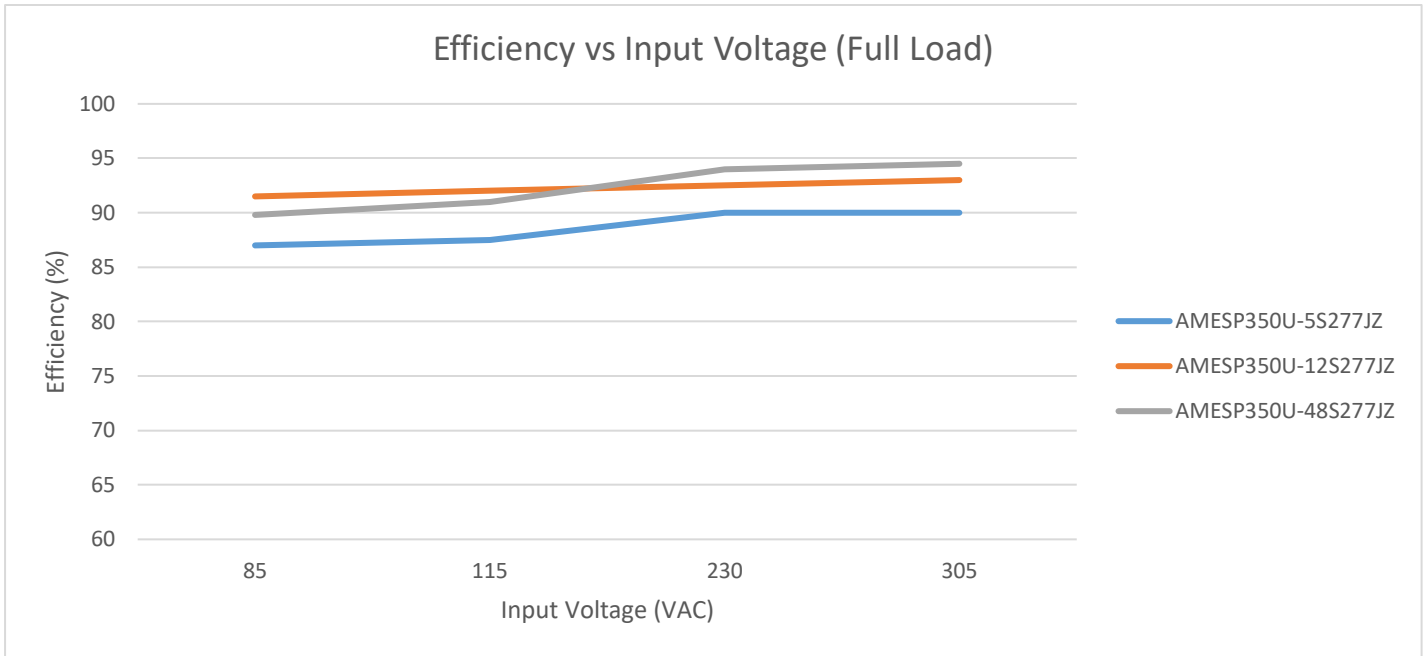


Dimensions

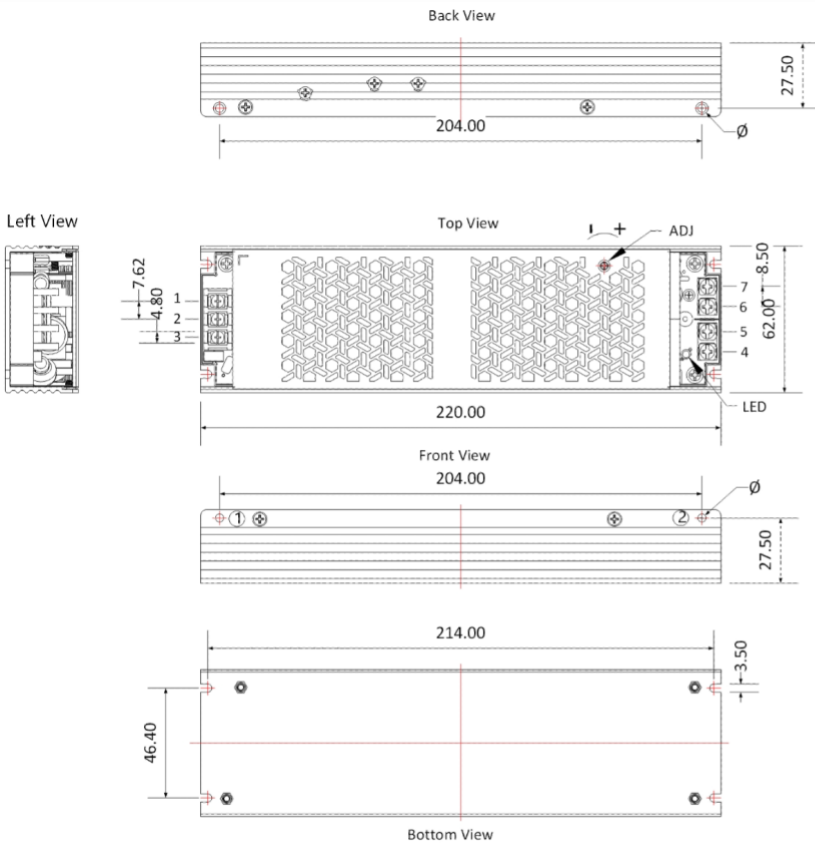

| Pin-Out | |
|---------|---------|
| Pin | Mark |
| 1 | \perp |
| 2 | AC(N) |
| 3 | AC(L) |
| 4 | +Vo |
| 5 | +Vo |
| 6 | -Vo |
| 7 | -Vo |

| Position | Screw Spec. | L(max) | Torque (max) |
|----------|-------------|--------|--------------|
| ① - ② | M3 | 6mm | 0.4N-m |

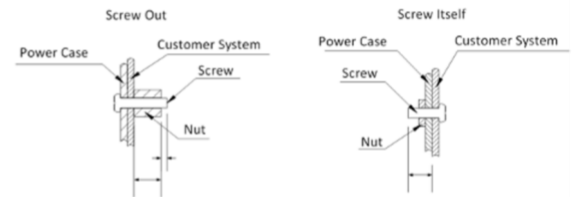

Note:
Unit: mm[inches]
ADJ: Output adjustable resistor
Wire range: 22-14AWG
Tightening torque: M3, Max 0.5N-m
General tolerances: $\pm 1.00[\pm 0.039]$

Note:

- That is a schematic diagram of side installation, install with M3x6 combination screws, derating refer to without aluminum plate curve.
- That is the schematic diagram of the bottom installation, install with M3x4 round head screws, it is necessary to apply thermal grease on the bottom of the product, derating refer to with aluminum plate curve.

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.